

TZB-隔爆/增安.双密封


TZB系列隔爆非铠装电缆引入装置(填料函、电缆戈兰) cable gland



材质 Material	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)
特点 Features	适用于非铠装电缆 Suitable for non armored cable
防爆标志 Ex mark	Ex d IIC Gb/ DIP A20
防护等级 Degree of protection	IP68
工作温度 COT	-60°C ~100°C



1、密封圈材质: 硅橡胶 1, sealing ring material: silicone rubber

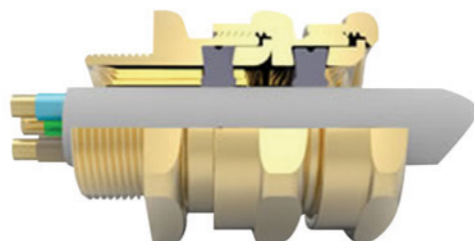

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		螺纹长度 D Threadlength D	电缆 B Cable B	最大外径E Max Across Corners E	L
	公制ISO Metric ISO	NPT/G				
TZB-01	M16 × 1.5/M20 × 1.5	3 / 8	15	3-8	22	55
TZB-02	M20 × 1.5	1 / 2	15	7.5-12	27	55
TZB-03	M20 × 1.5	1 / 2 / 3 / 4	15	11-14	34	55.1
TZB-04	M25 × 1.5	1 3 / 4	15	13-20	41	59.3
TZB-05	M32 × 1.5	1 1 / 4 / 1	15	19-26.5	53	62.2
TZB-06	M40 × 1.5	1 1 / 2 / 1 / 4	15	25-32.5	63	64.6
TZB-07	M50 × 1.5	2 1 / 2	15	31.5-44.4	75	79.8
TZB-08	M63 × 1.5	2 1 / 2 / 2	15	42.5-56.3	92	79.8
TZB-09	M75 × 1.5	3 1 / 2	15	54.5-68.2	109	83
TZB-10	M80 × 1.5	3 1 / 2	20	67-73	123	83
TZB-11	M90 × 2	3 1 / 2	20	67-77.6	132	83
TZB-12	M100 × 2	4 1 / 2	20	75-92	146	83

1、可选附件: 变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
2、NPT螺纹长度为有效螺纹长度;

1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
2, NPT thread length for effective thread length;

TT-隔爆/增安.胶封

TT系列隔爆非铠装电缆引入装置(填料函、电缆戈兰) cable gland




材质 Material	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)
特点 Features	适用于非铠装电缆 Suitable for non armored cable
防爆标志 Ex mark	Ex d IIC Gb/ DIP A21 TA
防护等级 Degree of protection	IP68
工作温度 COT	-60°C ~100°C



1、密封圈材质: 硅橡胶(-60°C~+80°C)
2、提供用于导线的隔爆胶泥
3、用于区1区2、20、21区和22区

1, sealing material: silicone rubber (-60 or C~+80 or C)
2, provide for explosive wires across the puddle
3, 2, 20, 21, 22 and 1 in the area.

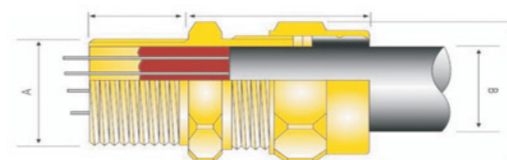

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		电缆 B Cable B	螺纹长度 Threadlength	最大外径E Max Across Corners E	G
	公制ISO Metric ISO	NPT/G				
TT-01S	M20*1.5	1 / 2	1-6	17	29	53
TT-01	M20*1.5	1 / 2	5-8	17	29	53
TT-02	M20*1.5	1 / 2	7-10	17	31	53
TT-03	M25*1.5	3 / 4	9-15	17	35	54
TT-04	M32*1.5	1	14-20	22	42	57
TT-05	M40*1.5	1_1/4	19-27	22	52	58
TT-06	M50*1.5	1_1/2	26-32	22	62	60
TT-07	M50*1.5	2	31-36	22	66	60
TT-08	M63*1.5	2	35-42	22	78	66
TT-09	M63*1.5	2_1/2	41-48	22	84	66
TT-10	M75*1.5	2_1/3	47-53	22	90	73
TT-11	M75*1.5	3	52-58	22	96	73
TT-12	M90*1.5	3	57-70	22	108	74

1、可选附件: 变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
2、NPT螺纹长度为有效螺纹长度;

1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
2, NPT thread length for effective thread length;